D*flow* Applicator



Dflow kit for harvesters balers and forage wagons.

Control box with digital display.

Easy set-up function.

Digital flow sensor.

Covered pump module.

Thru beam crop detection compatible.

Flow rate options

Dflow UV 0.10 to 1.0 itres per minute Dflow LV 0.50 to 5.0 litres per minute Dflow HV 1.00 to 10.0 liires per minute



Digital Control

The control box automatically monitors and adjusts the pump to keep it's output constant, this enables the pump to deliver additive precisely.

Simple operation

Settings for baler

Set you bale weight in Kg per Bale

Enter the application rate of your additive in litres per tonne.



Set how many bales made in an hour





The total litres dispensed are stored in memory



and can be zeroed.





A thru-beam crop sensor can be used with the Selmech

control box to

automatically turn

the pump on and off.

Settings for harvester or wagon


Enter the application rate of your additive in litres per tonne.

Set how many tonnes an hour are picked up










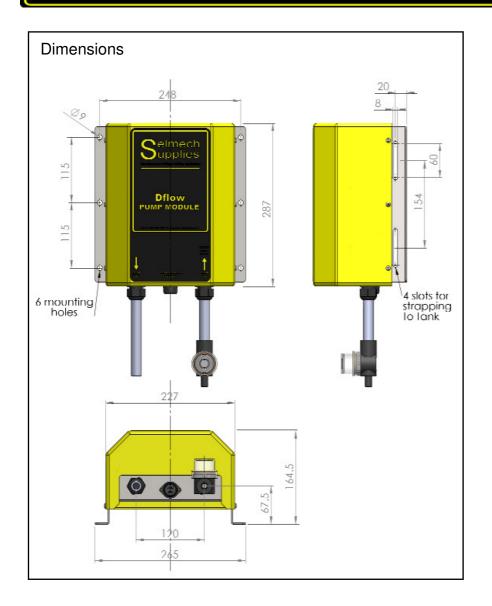

The Dflow module can be stapped to a barrel.

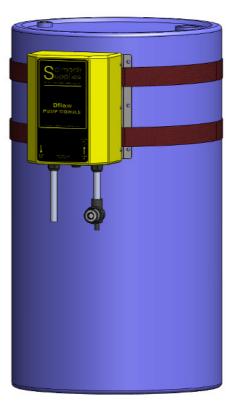





Selmech can also supply a 400 litre tank to be used in conjunction with a Dflow pump module .

Please note the tank does not come with any mounting brackets.